

Setup Luminair with the Smart Show NETDMX II

Ensure your iPad or iPhone is connected to the same wifi network. I have found it useful to enter in static information when connected to an access point without internet.

e.g.

IP Address: 192.168.1.xxx


Subnet Mask: 255.255.255.0

Router: 192.168.1.1 (Usually the router address check your router settings)

DNS 8.8.8.8 (This is to give the iPad something to go on. You can leave this field blank)


It may take a few minutes for the iPad to timeout looking for internet.

Make sure you see the wifi logo in the upper left corner to be sure the device is connected. My iPad usually takes a couple minutes to figure this out.

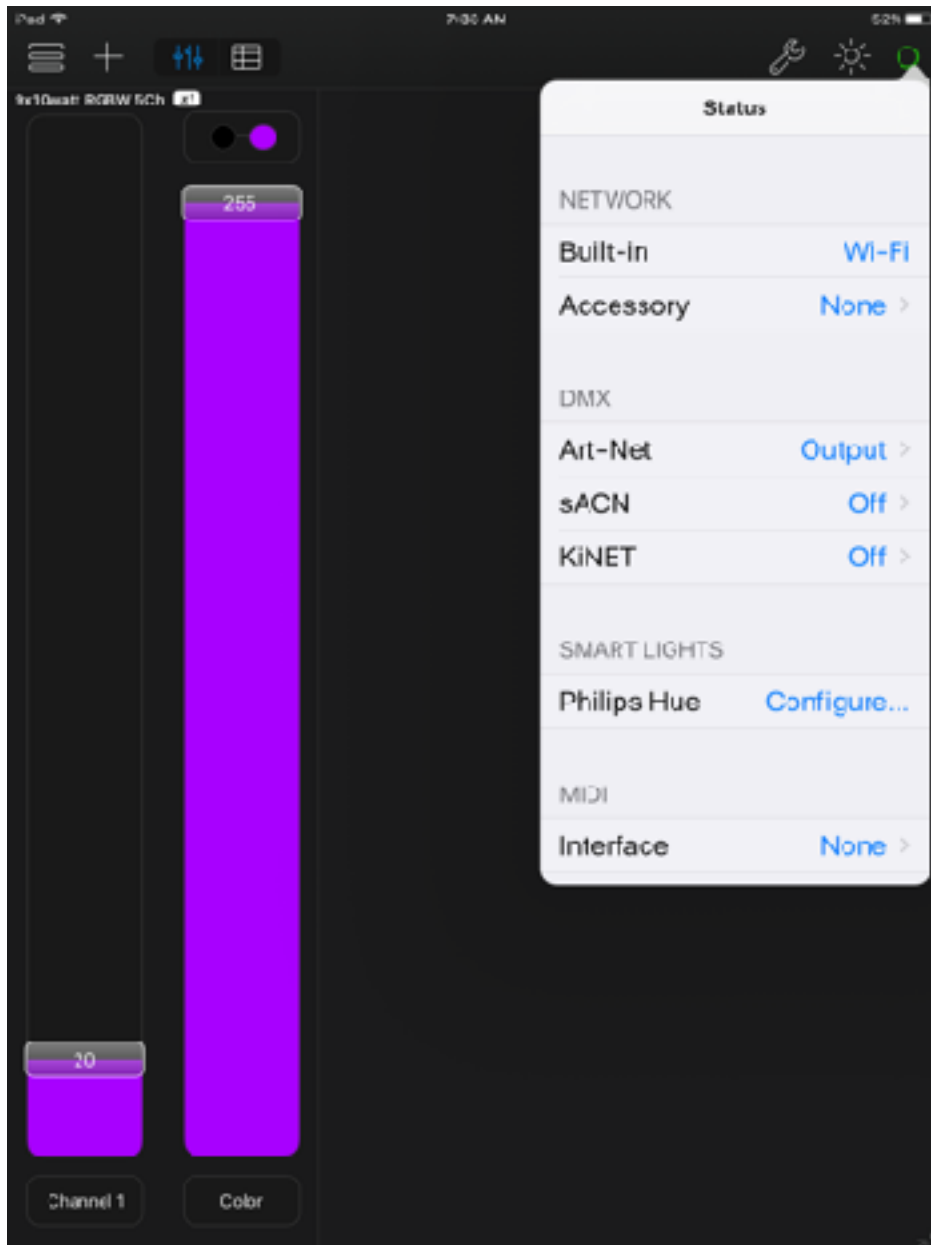


In Luminair, Click the circle in the upper right corner. I turned off sACN and KiNET.

Under network the built-in should read Wi-Fi. If it says not connected then go back to your wifi settings.

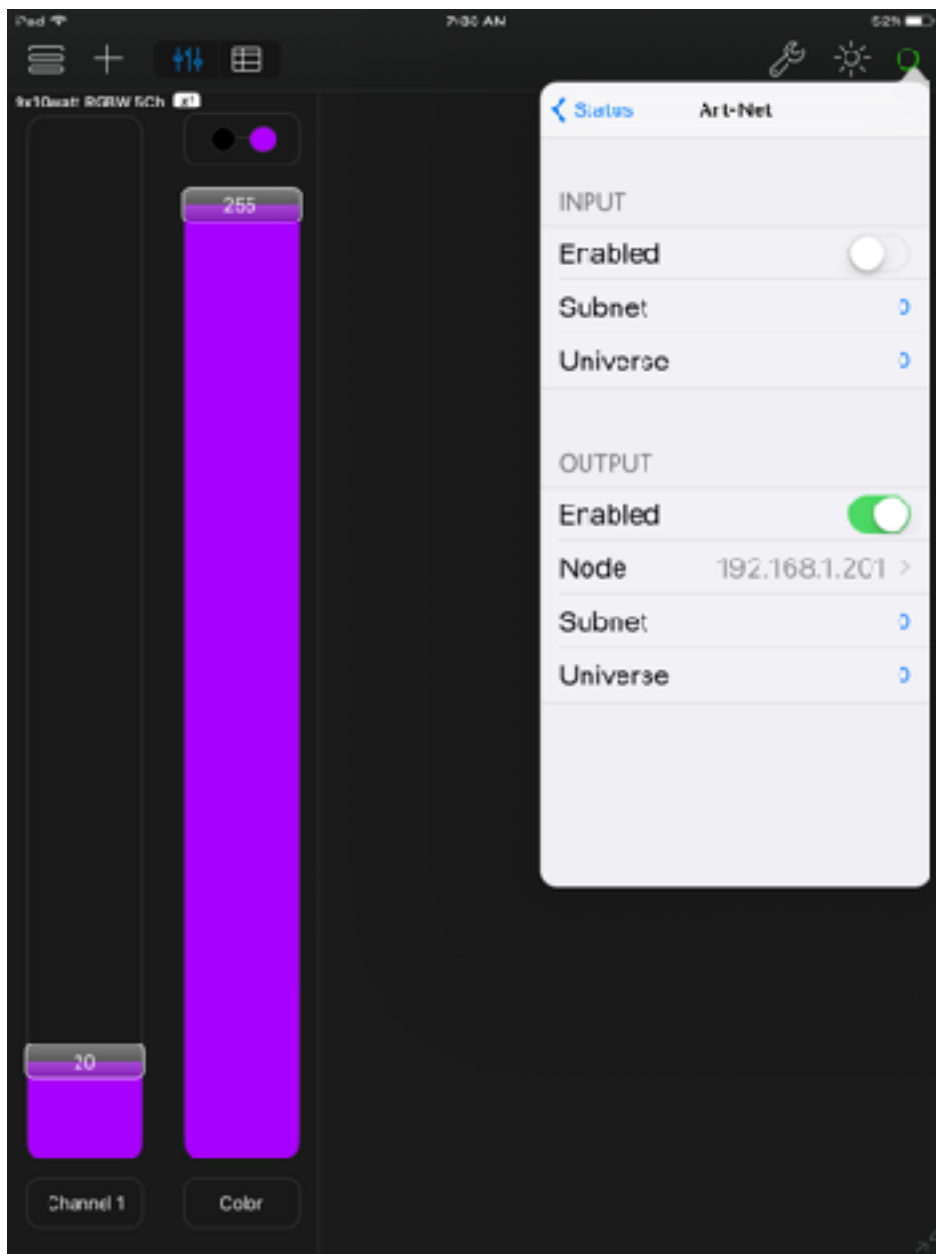

Next go into the Art-Net Settings. Then click into node.

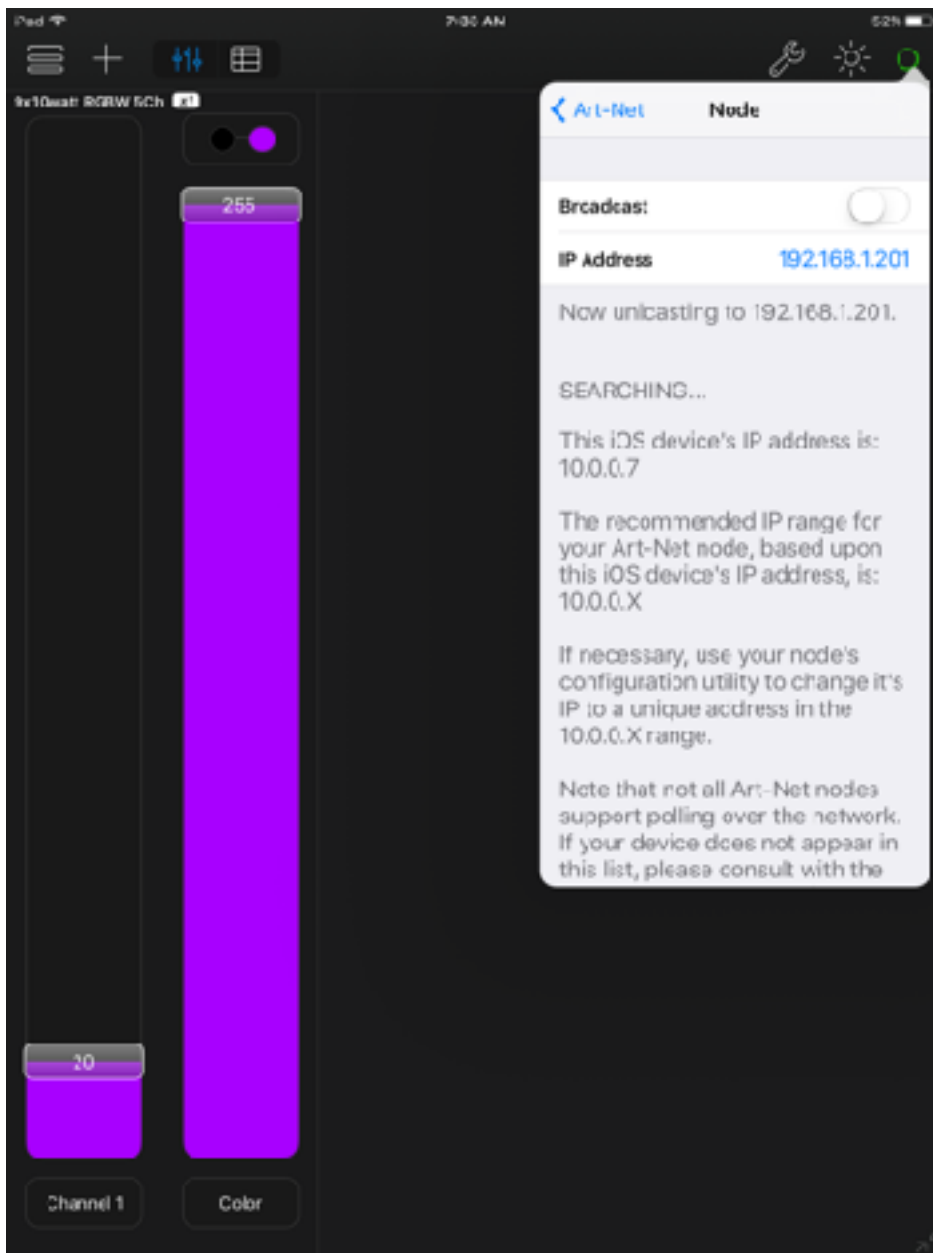

I disabled the input. Turn off broadcast and enter the ip address of the NETDMXII The default is 192.168.1.201

If everything is connected then the NETDMX II should flash the letter A repeatedly. When you leave the laminar app then the flashing will stop. This tells you that there is connection.

Hope this helps.